



RX 70 Technical Data

Diesel and LPG forklift trucks

RX 70-22

RX 70-25

RX 70-30

RX 70-35

RX 70-30

Hybrid

RX 70-35

Hybrid



first in intralogistics

This specification sheet to VDI Guideline 2198 only gives the technical figures for the standard truck.
Different tyres, other masts, additional equipment etc. could give different figures.

Characteristics	1.1	Manufacturer			STILL	STILL	STILL	STILL
	1.2	Manufacturer's model designation			RX 70-22	RX 70-22 TDI-PD	RX 70-22T	RX 70-25
	1.2.1	Manufacturer's type designation			7321	7329	7325	7322
	1.3	Truck type			Diesel	Diesel	LP gas	Diesel
	1.4	Operation			Rider seated	Rider seated	Rider seated	Rider seated
	1.5	Rated capacity	Q	kg	2200	2200	2200	2500
	1.6	Load centre	c	mm	500	500	500	500
	1.8	Load distance	x	mm	430	430	430	430
	1.9	Wheel base	y	mm	1700	1700	1700	1700
Weights	2.1	Truck weight		kg	3630	3630	3630	3750
	2.2	Axle load, laden, front		kg	5049	5049	5049	5508
	2.2.1	Axle load, laden, rear		kg	781	781	781	742
	2.3	Axle load, unladen, front		kg	1646	1646	1646	1640
	2.3.1	Axle load, unladen, rear		kg	1984	1984	1984	2110
Wheels chassis	3.1	Tyres			SE	SE	SE	SE
	3.2	Tyre size, front			23 x 9-10	23 x 9-10	23 x 9-10	23 x 9-10
	3.3	Tyre size, rear			21 x 8-9	21 x 8-9	21 x 8-9	21 x 8-9
	3.5	Number of wheels front (x = driven)			2x	2x	2x	2x
	3.5.1	Number of wheels rear (x = driven)			2	2	2	2
	3.6	Track width, front	b ₁₀	mm	984	984	984	984
Basic dimensions	3.7	Track width, rear	b ₁₁	mm	920	920	920	920
	4.1	Tilt Mast/Fork carriage, forward		°	6	6	6	6
	4.1.1	Tilt Mast/Fork carriage, back		°	10	10	10	10
	4.2	Height, mast lowered	h ₁	mm	2175	2175	2175	2175
	4.3	Free lift	h ₂	mm	160	160	160	160
	4.4	Lift	h ₃	mm	3020	3020	3020	3020
	4.5	Height, mast raised	h ₄	mm	3650	3650	3650	3650
	4.7	Height over overhead guard (cab)	h ₆	mm	2190	2190	2190	2190
	4.8	Seat height/stand height rel. to SIP	h ₇	mm	1074	1074	1074	1074
	4.12	Coupling height	h ₁₀	mm	425	425	425	425
	4.19	Overall length	l ₁	mm	3570	3570	3570	3600
	4.20	Length including fork backs	l ₂	mm	2570	2570	2570	2600
	4.21	Overall width	b ₁	mm	1180	1180	1180	1180
	4.22	Fork thickness	s	mm	40	40	40	40
	4.22.1	Fork width	e	mm	100	100	100	100
	4.22.2	Fork length	l	mm	1000	1000	1000	1000
	4.23	Fork carriage ISO 2328, Class/Form A, B			Kl. II/Form A	Kl. II/Form A	Kl. II/Form A	Kl. II/Form A
	4.24	Fork carriage width	b ₃	mm	1040	1040	1040	1040
	4.31	Floor clearance under mast, laden	m ₁	mm	125	125	125	125
	4.32	Floor clearance, centre of wheel-base	m ₂	mm	150	150	150	150
4.33	Working aisle - 1000 x 1200 pallet crosswise	A _{st}	mm	3912	3912	3912	3942	
4.34	Working aisle - 800 x 1200 pallet lengthways	A _{st}	mm	4112	4112	4112	4142	
4.35	Turning radius	W _a	mm	2282	2282	2282	2312	
4.36	Smallest pivot point distance	b ₁₃	mm	584	584	584	584	
Performance	5.1	Travel speed laden		km/h	21	21	21	21
	5.1.1	Travel speed unladen		km/h	21	21	21	21
	5.2	Hoist speed laden		m/s	0,51	0,58	0,53	0,51
	5.2.1	Hoist speed unladen		m/s	0,53	0,59	0,55	0,53
	5.3	Lowering speed laden		m/s	0,60	0,60	0,60	0,60
	5.3.1	Lowering speed unladen		m/s	0,53	0,53	0,53	0,53
	5.5	Drawbar pull laden		N	17500	17600	17500	17500
	5.5.1	Drawbar pull unladen		N	12140	12140	12040	12140
	5.7	Max. gradeability laden		%	29	28	29	29
	5.7.1	Max. gradeability unladen		%	26	26	26	26
5.9	Acceleration time laden		s	5,2	4,7	5,2	5,2	
5.9.1	Acceleration time unladen		s	4,6	4,3	4,6	4,6	
5.10	Service brake			electr./hydr.	electr./hydr.	electr./hydr.	electr./hydr.	
Engine	7.1	Engine manufacturer			VW	VW	VW	VW
	7.1.1	Type			BXT	CBHA	BEF	BXT
	7.2	Engine rating to ISO 1585		kW	30	44	36	30
	7.2.1	Additional power of electrical energy storage		kW				
	7.3	Nenn Drehzahl		1/min	2600	2600	2600	2600
	7.4	No. of cylinders			4	4	4	4
	7.4.1	Swept volume		cm ³	1900	2000	2000	1900
	7.5	Fuel consumption to VDI Cycle (60 runs/h)		l/h kg/h	2,4	2,9	2,5	2,5
7.9	On-board voltage		V	12	12	12	12	
Miscellaneous	8.1	Drive control			Diesel-electric	Diesel-electric	Diesel-electric	Diesel-electric
	10.1	Working pressure for attachments		bar	250	250	250	250
	10.2	Oil volume for attachments		l/min	30	30	30	30
	10.4	Volume fuel tank		l/kg	58	58	11	58
	10.7	Sound pressure level L _{PAZ} ¹ (driver's seat)		dB (A)	<77	<77	<77	<77
	10.7.1	Sound power level LWAZ (work cycle)		dB (A)	<100	<99	<97	<100
		Body vibrations in accordance with EN 13059		m/s ²	0,58	0,58	0,58	0,58
	10.8	Towing coupler, Type/Model DIN			Pin	Pin	Pin	Pin

¹ With reduced rated capacity and/or limited lift height.

This specification sheet to VDI Guideline 2198 only gives the technical figures for the standard truck.
Different tyres, other masts, additional equipment etc. could give different figures.


Characteristics	1.1	Manufacturer		STILL	STILL	STILL	STILL		
	1.2	Manufacturer's model designation		RX 70-25 TDI-PD	RX 70-25T	RX 70-30	RX 70-30 Hybrid		
	1.2.1	Manufacturer's type designation		7330	7326	7323	7323		
	1.3	Truck type		Diesel	LP gas	Diesel	Diesel/Hybrid		
	1.4	Operation		Rider seated	Rider seated	Rider seated	Rider seated		
	1.5	Rated capacity	Q	kg	2500	2500	3000	3000	
	1.6	Load centre	c	mm	500	500	500	500	
	1.8	Load distance	x	mm	430	430	450	450	
	1.9	Wheel base	y	mm	1700	1700	1700	1700	
Weights	2.1	Truck weight		kg	3750	3750	4200	4235	
	2.2	Axle load, laden, front		kg	5508	5508	6326	6335	
	2.2.1	Axle load, laden, rear		kg	742	742	874	900	
	2.3	Axle load, unladen, front		kg	1640	1640	1650	1660	
	2.3.1	Axle load, unladen, rear		kg	2110	2110	2550	2575	
Wheels chassis	3.1	Tyres		SE	SE	SE	SE		
	3.2	Tyre size, front		23 x 9-10	23 x 9-10	23 x 9-10	23 x 9-10		
	3.3	Tyre size, rear		21 x 8-9	21 x 8-9	21 x 8-9	21 x 8-9		
	3.5	Number of wheels front (x = driven)		2x	2x	2x	2x		
	3.5.1	Number of wheels rear (x = driven)		2	2	2	2		
	3.6	Track width, front	b ₁₀	mm	984	984	984	984	
3.7	Track width, rear	b ₁₁	mm	920	920	920	920		
Basic dimensions	4.1	Tilt Mast/Fork carriage, forward		°	6	6	6	6	
	4.1.1	Tilt Mast/Fork carriage, back		°	10	10	10	10	
	4.2	Height, mast lowered	h ₁	mm	2175	2175	2175	2175	
	4.3	Free lift	h ₂	mm	160	160	160	160	
	4.4	Lift	h ₃	mm	3020	3020	3020	3020	
	4.5	Height, mast raised	h ₄	mm	3650	3650	3800	3800	
	4.7	Height over overhead guard (cab)	h ₆	mm	2190	2190	2190	2190	
	4.8	Seat height/stand height rel. to SIP	h ₇	mm	1074	1074	1074	1074	
	4.12	Coupling height	h ₁₀	mm	425	425	425	425	
	4.19	Overall length	l ₁	mm	3600	3600	3705	3705	
	4.20	Length including fork backs	l ₂	mm	2600	2600	2705	2705	
	4.21	Overall width	b ₁	mm	1180	1180	1180	1180	
	4.22	Fork thickness	s	mm	40	40	50	50	
	4.22.1	Fork width	e	mm	100	100	100	100	
	4.22.2	Fork length	l	mm	1000	1000	1000	1000	
	4.23	Fork carriage ISO 2328, Class/Form A, B			Kl. II/Form A	Kl. II/Form A	Kl. III/Form A	Kl. III/Form A	
	4.24	Fork carriage width	b ₃	mm	1040	1040	1100	1100	
	4.31	Floor clearance under mast, laden	m ₁	mm	125	125	125	125	
	4.32	Floor clearance, centre of wheel-base	m ₂	mm	150	150	150	150	
4.33	Working aisle - 1000 x 1200 pallet crosswise	A _{st}	mm	3942	3942	4037	4037		
4.34	Working aisle - 800 x 1200 pallet lengthways	A _{st}	mm	4142	4142	4237	4237		
4.35	Turning radius	W _a	mm	2312	2312	2387	2387		
4.36	Smallest pivot point distance	b ₁₃	mm	584	584	584	584		
Performance	5.1	Travel speed laden		km/h	21	21	21	21	
	5.1.1	Travel speed unladen		km/h	21	21	21	21	
	5.2	Hoist speed laden		m/s	0,58	0,53	0,48	0,47	
	5.2.1	Hoist speed unladen		m/s	0,59	0,55	0,51	0,53	
	5.3	Lowering speed laden		m/s	0,60	0,60	0,60	0,60	
	5.3.1	Lowering speed unladen		m/s	0,53	0,53	0,53	0,53	
	5.5	Drawbar pull laden		N	17600	17500	17600	17700	
	5.5.1	Drawbar pull unladen		N	12140	12040	12300	12300	
	5.7	Max. gradeability laden		%	28	29	24	22	
	5.7.1	Max. gradeability unladen		%	26	26	23	23	
	5.9	Acceleration time laden		s	4,9	5,2	5,3	5,5	
5.9.1	Acceleration time unladen		s	4,3	4,6	4,5	4,6		
5.10	Service brake			electr./hydr.	electr./hydr.	electr./hydr.	electr./hydr.		
Engine	7.1	Engine manufacturer		VW	VW	VW	VW		
	7.1.1	Type		CBHA	BEF	CBHA	BXT		
	7.2	Engine rating to ISO 1585		kW	44	36	44	30	
	7.2.1	Additional power of electrical energy storage						8	
	7.3	Nenn Drehzahl		1/min	2600	2600	2600	2600	
	7.4	No. of cylinders			4	4	4	4	
	7.4.1	Swept volume			cm ³	2000	2000	2000	1900
	7.5	Fuel consumption to VDI Cycle (60 runs/h)		l/h	3,1		3,3	2,9	
7.9	On-board voltage		V	12	12	12	12		
Miscellaneous	8.1	Drive control		Diesel-electric	Diesel-electric	Diesel-electric	Diesel-electric		
	10.1	Working pressure for attachments		bar	250	250	250	250	
	10.2	Oil volume for attachments		l/min	30	30	30	30	
	10.4	Volume fuel tank		l/kg	58	11	58	58	
	10.7	Sound pressure level L _{PAZ} ¹ (driver's seat)		dB (A)	<77	<77	<77	<76	
	10.7.1	Sound power level LWAZ (work cycle)		dB (A)	<99	<97	<100	<100	
		Body vibrations in accordance with EN 13059		m/s ²	0,58	0,58	0,58	0,58	
	10.8	Towing coupler, Type/Model DIN		Pin	Pin	Pin	Pin		

¹ With reduced rated capacity and/or limited lift height.

This specification sheet to VDI Guideline 2198 only gives the technical figures for the standard truck.
Different tyres, other masts, additional equipment etc. could give different figures.

Characteristics	1.1	Manufacturer		STILL	STILL	STILL	STILL		
	1.2	Manufacturer's model designation		RX 70-30T	RX 70-35	RX 70-35 Hybrid	RX 70-35T		
	1.2.1	Manufacturer's type designation		7327	7324	7324	7328		
	1.3	Truck type		LP gas	Diesel	Diesel/Hybrid	LP gas		
	1.4	Operation		Rider seated	Rider seated	Rider seated	Rider seated		
	1.5	Rated capacity	Q	kg	3000	3500	3500	3500	
	1.6	Load centre	c	mm	500	500	500	500	
	1.8	Load distance	x	mm	450	450	450	450	
	1.9	Wheel base	y	mm	1700	1700	1700	1700	
Weights	2.1	Truck weight		kg	4200	4530	4565	4530	
	2.2	Axle load, laden, front		kg	6326	7065	7075	7065	
	2.2.1	Axle load, laden, rear		kg	874	965	990	965	
	2.3	Axle load, unladen, front		kg	1650	1610	1620	1610	
	2.3.1	Axle load, unladen, rear		kg	2550	2920	2945	2920	
Wheels chassis	3.1	Tyres		SE	SE	SE	SE		
	3.2	Tyre size, front		23 x 9-10	23 x 10-12	23 x 10-12	23 x 10-12		
	3.3	Tyre size, rear		21 x 8-9	21 x 8-9	21 x 8-9	21 x 8-9		
	3.5	Number of wheels front (x = driven)		2x	2x	2x	2x		
	3.5.1	Number of wheels rear (x = driven)		2	2	2	2		
	3.6	Track width, front	b ₁₀	mm	984	954	954	954	
3.7	Track width, rear	b ₁₁	mm	920	920	920	920		
Basic dimensions	4.1	Tilt Mast/Fork carriage, forward		°	6	6	6		
	4.1.1	Tilt Mast/Fork carriage, back		°	10	10	10		
	4.2	Height, mast lowered	h ₁	mm	2175	2175	2175	2175	
	4.3	Free lift	h ₂	mm	160	160	160	160	
	4.4	Lift	h ₃	mm	3020	2820	2820	2820	
	4.5	Height, mast raised	h ₄	mm	3800	3700	3700	3700	
	4.7	Height over overhead guard (cab)	h ₆	mm	2190	2195	2195	2195	
	4.8	Seat height/stand height rel. to SIP	h ₇	mm	1074	1074	1074	1074	
	4.12	Coupling height	h ₁₀	mm	425	425	425	425	
	4.19	Overall length	l ₁	mm	3705	3770	3770	3770	
	4.20	Length including fork backs	l ₂	mm	2705	2770	2770	2770	
	4.21	Overall width	b ₁	mm	1180	1194	1194	1194	
	4.22	Fork thickness	s	mm	50	50	50	50	
	4.22.1	Fork width	e	mm	100	120	100	100	
	4.22.2	Fork length	l	mm	1000	1000	1000	1000	
	4.23	Fork carriage ISO 2328, Class/Form A, B			Kl. III/Form A	Kl. III/Form A	Kl. III/Form A	Kl. III/Form A	
	4.24	Fork carriage width	b ₃	mm	1100	1100	1100	1100	
	4.31	Floor clearance under mast, laden	m ₁	mm	125	125	125	125	
	4.32	Floor clearance, centre of wheel-base	m ₂	mm	150	150	150	150	
	4.33	Working aisle - 1000 x 1200 pallet crosswise	A _{st}	mm	4037	4127	4127	4127	
4.34	Working aisle - 800 x 1200 pallet lengthways	A _{st}	mm	4237	4327	4327	4327		
4.35	Turning radius	W _a	mm	2387	2477	2477	2477		
4.36	Smallest pivot point distance	b ₁₃	mm	584	584	584	584		
Performance	5.1	Travel speed laden		km/h	21	21	21	21	
	5.1.1	Travel speed unladen		km/h	21	21	21	21	
	5.2	Hoist speed laden		m/s	0,48	0,48	0,45	0,48	
	5.2.1	Hoist speed unladen		m/s	0,50	0,51	0,53	0,50	
	5.3	Lowering speed laden		m/s	0,60	0,60	0,60	0,60	
	5.3.1	Lowering speed unladen		m/s	0,53	0,53	0,53	0,53	
	5.5	Drawbar pull laden		N	17500	17400	17700	17000	
	5.5.1	Drawbar pull unladen		N	12300	13400	13400	13400	
	5.7	Max. gradeability laden		%	25	21	20	22	
	5.7.1	Max. gradeability unladen		%	23	20	20	20	
	5.9	Acceleration time laden		s	5,2	5,4	5,6	5,5	
5.9.1	Acceleration time unladen		s	4,6	4,7	4,8	4,9		
5.10	Service brake			electr./hydr.	electr./hydr.	electr./hydr.	electr./hydr.		
Engine	7.1	Engine manufacturer		VW	VW	VW	VW		
	7.1.1	Type		BEF	CBHA	BXT	BEF		
	7.2	Engine rating to ISO 1585		kW	38	44	30	38	
	7.2.1	Additional power of electrical energy storage				8			
	7.3	Nenndrehzahl		1/min	2600	2600	2600	2600	
	7.4	No. of cylinders			4	4	4	4	
	7.4.1	Swept volume			cm ³	2000	2000	1900	2000
	7.5	Fuel consumption to VDI Cycle (60 runs/h)		l/h		2,9	3,5	3,1	
7.9	On-board voltage		V	12	12	12	12		
Miscellaneous	8.1	Drive control		Diesel-electric	Diesel-electric	Diesel-electric	Diesel-electric		
	10.1	Working pressure for attachments		bar	250	250	250	250	
	10.2	Oil volume for attachments		l/min	30	30	30	30	
	10.4	Volume fuel tank		l/kg	11	58	58	11	
	10.7	Sound pressure level L _{PAZ} ¹ (driver's seat)		dB (A)	<77	<77	<76	<77	
	10.7.1	Sound power level LWAZ (work cycle)		dB (A)	<97	<100	<100	<97	
		Body vibrations in accordance with EN 13059		m/s ²	0,58	0,58	0,58	0,58	
	10.8	Towing coupler, Type/Model DIN			Pin	Pin	Pin	Pin	

¹ With reduced rated capacity and/or limited lift height.

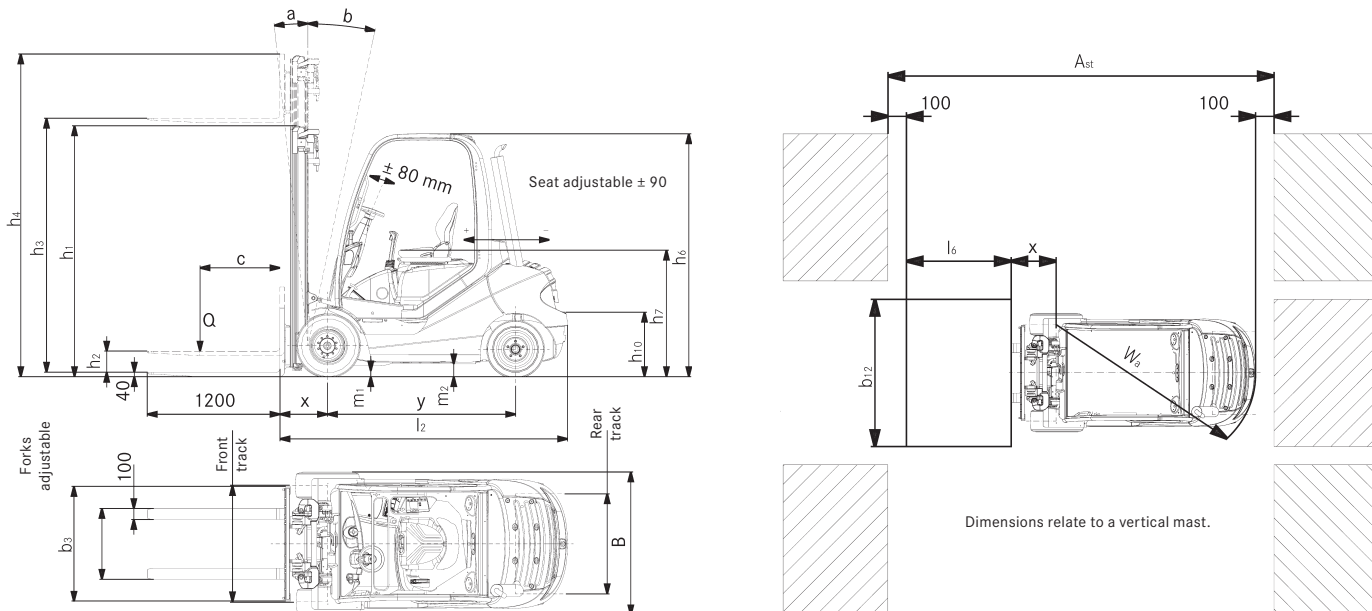


			Tele mast	HiLo mast	Triplex mast		
RX 70-22/25	Rated lift	h ₃	mm	2320-5120	2500-4800	3580-5080	5230-7780
	Overall height	h ₁	mm	1825-3225	1825-2975	1825-2325	2375-3225
	Free lift Form A	h ₂	mm	160	1240-2390	1240-1740	1790-2640
	Free lift Form B	h ₂	mm	160	1195-2345	1195-1695	1745-2595
	Greatest height Form A	h ₄	mm	2950-5750	3090-5250	4185-5685	5835-8385
	Greatest height Form B	h ₄	mm	2980-5780	3160-5280	4255-5755	5905-8455
	Forward tilt	a	°	6		6	
	Back tilt	b	°	10 (with front screen 8)		8	
Load distance	x	mm	430		455		
Tyres	v/h		23 x 9-10 // 21 x 8-9		23 x 9-10 // 21 x 8-9		
Greatest width (dual tyres)	B	mm	1180 (dual 1722)		1180 (dual 1722)	1280 (dual 1722)	
RX 70-22	Overall length	L ₂	mm	2570		2595	
	Working aisle width	A _{st}	mm	(1000 x 1200) 3912 // (1200 x 800) 4112		(1000 x 1200) 3937 // (1200 x 800) 4137	
	Track	v/h	mm	984/920 (dual = 1220/920)		984//920 (dual = 1220/920)	1048//920 (dual = 1220/920)
RX 70-25	Overall length	L ₂	mm	2600		2625	
	Working aisle width	A _{st}	mm	(1000 x 1200) 3942 // (1200 x 800) 4142		(1000 x 1200) 3967 // (1200 x 800) 4167	
	Track	v/h	mm	984/920 (dual = 1220/920)		984//920 (dual = 1220/920)	1048//920 (dual = 1220/920)


			Tele mast	HiLo mast	Triplex mast	
RX 70-30	Rated lift	h ₃	mm	2320-5120	2390-4690	3430-7630
	Overall height	h ₁	mm	1825-3225	1825-2975	1825-3225
	Free lift Form A	h ₂	mm	160	1190-2340	1190-2590
	Free lift Form B	h ₂	mm	160	1045-2195	1045-2445
	Greatest height Form A	h ₄	mm	3100-5900	3080-5380	4110-8310
	Greatest height Form B	h ₄	mm	3130-5930	3200-5500	4275-8475
	Forward tilt	a	°	6		6
	Back tilt	b	°	10 (with front screen 8)		8
	Load distance	x	mm	450		475
	Tyres	v/h		23 x 9-10 (23 x 10-12) // 21 x 8-9		23 x 10-12 // 21 x 8-9
	Greatest width (dual tyres)	B	mm	1180 (1194) (dual 1722)		1280 (dual 1722)
	Overall length	L ₂	mm	2705		2730
Working aisle width	A _{st}	mm	(1000 x 1200) 4037 // (1200 x 800) 4237		(1000 x 1200) 4062 // (1200 x 800) 4262	
Track	v/h	mm	984(1048)/920 (dual = 1220/920)		1048/920 (dual = 1220/920)	

			Tele mast	HiLo mast	Triplex mast	
RX 70-35	Rated lift	h ₃	mm	2120-4920	2190-4290	3130-7330
	Overall height	h ₁	mm	1825-3225	1825-2875	1825-3225
	Free lift Form A	h ₂	mm	160	1090-2140	1090-2590
	Free lift Form B	h ₂	mm	160	1045-2095	1045-2445
	Greatest height Form A	h ₄	mm	3000-5800	2955-5055	3810-8010
	Greatest height Form B	h ₄	mm	3030-5830	3000-5100	3975-8175
	Forward tilt	a	°	6		6
	Back tilt	b	°	10 (with front screen 8)		8
	Load distance	x	mm	450		475
	Tyres	v/h		23 x 10-12 // 21 x 8-9		23 x 10-12 // 21 x 8-9
	Greatest width (dual tyres)	B	mm	1194 (dual 1722)		1280 (dual 1722)
	Overall length	L ₂	mm	2770		2795
Working aisle width	A _{st}	mm	(1000 x 1200) 4127 // (1200 x 800) 4327		(1000 x 1200) 4152 // (1200 x 800) 4352	
Track	v/h	mm	1048/920 (dual = 1220/920)		1048/920 (dual = 1220/920)	


Basic Capacities RX 70-22 Tele/Full free lift HiLo mast

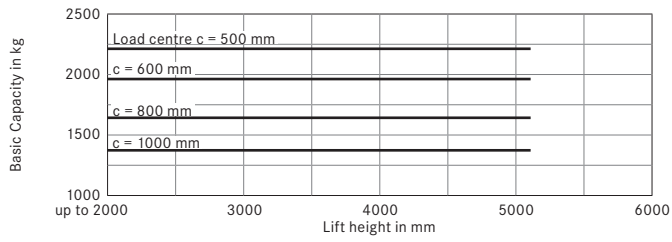


Basic Capacities RX 70-22 Triplex mast

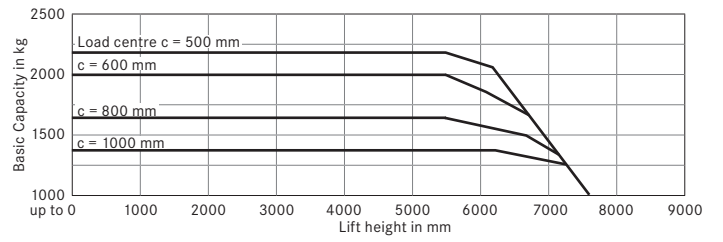


Basic Capacities RX 70-25 Tele/Full free lift HiLo mast

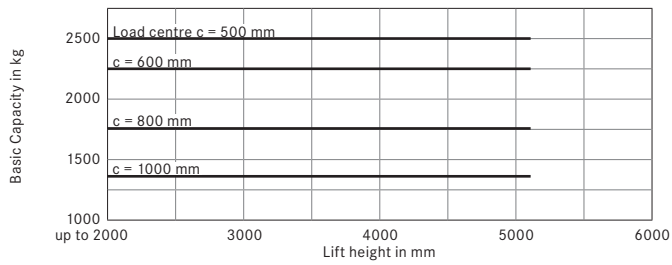


Basic Capacities RX 70-25 Triplex mast

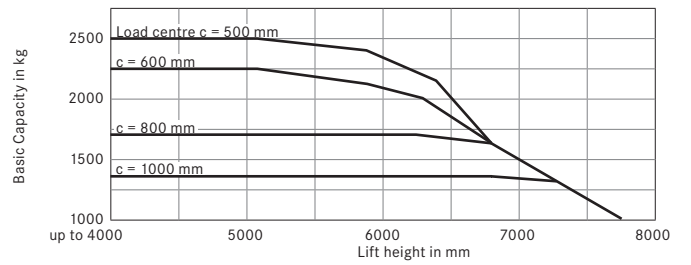


Basic Capacities RX 70-30 Tele/Full free lift HiLo mast

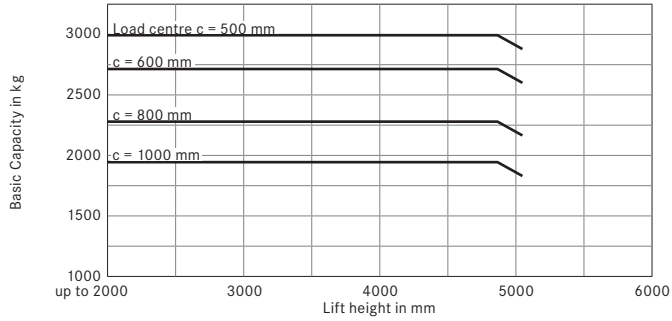


Basic Capacities RX 70-30 (7323 and 7327) Triplex mast

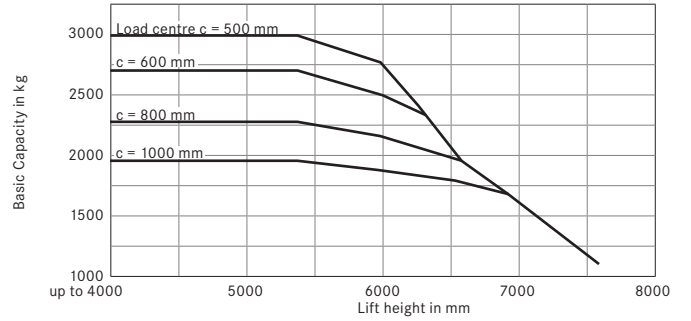

Basic Capacities RX 70-35 Tele/Full free lift HiLo mast

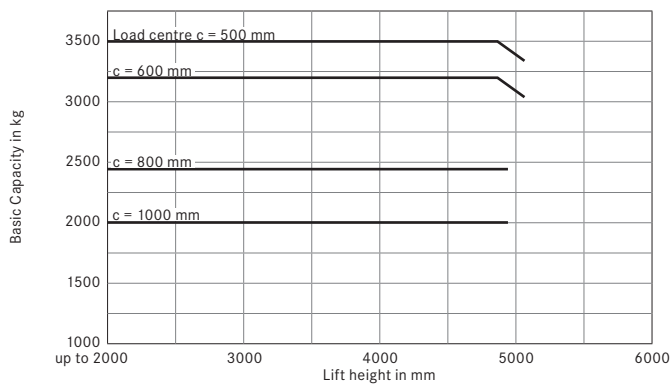

Basic Capacities RX 70-35 Triplex mast

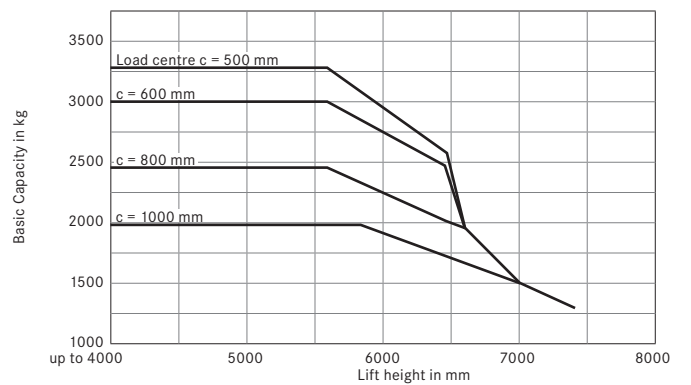

Overall concept:

- Engine powered four wheeled counterbalance forklift truck with front wheel drive.
- The overall height of the truck supplied as standard is suitable for standard 8'6" containers.

Drive.

- Engine-electric drive with hybrid technology.
- Modern diesel and gas engines with 3-phase generator.
- Gas truck with regulated 3-way Cat*.
- Drive axle with enclosed 3-phase drive motor.
- Wear-free multi-disc brake running in oil bath.
- Hydraulic engine fan.

Hybrid trucks*

- Diesel-electric drive with recuperation of brake energy and storage of the energy in an electric energy storage system (Ultracaps)
- Use of the stored energy to accelerate the truck

Ergonomics.

- Generously laid out driver's workplace.
- High driver comfort and operating convenience due to optimal arrangement of all controls.
- Excellent visibility to all sides.

Safety.

- Low truck centre of gravity and an articulating steer axle for the best stability.
- High residual capacities even at high lifts.
- Excellent driving stability around bends - no electronic aids required.

Environment.

- Very low fuel consumption in all types of work cycles
- Low emissions meeting directive 97/68/EG level 3a

Hybrid trucks*

- Eco-friendly and resource-saving hybrid drive
- Reduction of the conceptually low fuel consumption by another 20% per hour of operation
- Reduction of CO₂ emissions
- Reduction of noise emission by reducing the engine speed when lifting and driving

Service.

- Long maintenance interval - 1000 operating hours.
- Quick fault identification in the event of damage due to computerised diagnostics.
- Optimal accessibility for maintenance.

*Standard or optional equipment

Technical features:

Driver's workplace.

- Low, easy entry step.
- Long hand grip on overhead guard for different gripping heights.
- Large footwell with vibration inhibiting floor covering plus automotive arrangement of the pedals.
- Hydraulic servo steering with small steering wheel, ergonomic off-centre position, offset to the left.
- Narrow steering column without cumbersome display instruments.
- Central display of the drive direction plus change of drive direction in the field of view.
- Large display and operating unit to the right of the driver's workplace.

Energy saving feature Blue-Q.

- Activation of the Blue-Q efficiency mode by pressing a button on the dashboard
- Energy saving by intelligent optimisation of the drive characteristics without impairing the work under progress
- Intelligent switch-off of electric equipment
- Possible energy saving depending on the application profile and truck equipment up to 10%

Selectable drive parameters.

- Acceleration and braking of the truck can be carried out with just the drive pedal.
- Five drive stages adjustable by the driver.
- Individual setting of speed, acceleration and braking within each drive stage.
- Intelligent drive characteristics with engine speed reduction when the truck has finished accelerating.

Electrical system.

- Designed in modern CAN bus technology.
- 12 Volt electrics.
- High-speed bus for drive unit regulation.
- Dedicated CAN bus for lighting and peripherals.
- Cable sets sheathed in corrugated tubing with water tight plug connectors.

Mast and hydraulics.

- On demand delivery from hydraulic variable displacement pump for the working and steering hydraulics.
- Separation of hoist hydraulics and drive, so no inching required.
- Wide construction, open telescopic mast with and without full free lift and as a Triplex variant.
- Clear view fork carriage with open frame profile.

Additional equipment features (Optional):

Truck equipment.

- Superelastic or pneumatic tyres, single or dual versions.

Engine.

- Gas truck with alternatives of gas bottle or tank.
- Regenerative soot particle filter in the counterweight or as a replaceable filter system.
- Wide core radiator and additional air filter for use in environments containing dust or fibres.

Cab equipment.

- Modular construction cab with front, rear and roof screen.
- Rear mounted damped doors with large opening angles and windows sliding in opposite directions.
- Parallel screen wiper with large wiped area for front and rear screen, with screen washer as standard.
- Rear screen heater as standard.
- Unbreakable exterior and interior mirrors.
- Comfort seat variants with cloth cover, air sprung, seat heater, lumbar support, extended backrest.
- Radio/CD player housed in the interior lining of the overhead guard.

Controls.

- Drive actuated by two pedal controls.
- Actuation of the hydraulic functions by Joystick or Fingertip control.

Electrical equipment and drive control.

- Tempomat.
- Automotive style lighting also approved for use on public highways.
- Working spotlights front and/or rear on the overhead guard.
- Components of the Materialflow Management System (MMS).
- FleetManager™ – Driver identification and control, analysis of truck operating data and accident recorder.
- Camera systems for mast and reversing.

Mast and hydraulics.

- Auxiliary hydraulics for actuating functions on attachments.
- Various fork carriage widths and fork lengths.
- Attachments to suit each load.
- Hydraulic accumulator to damp shocks in the hydraulic system.